

## **Impact of Typhoons on the Western Pacific: Observing the Evolution of Typhoon Wakes**

Luc Rainville  
Applied Physics Laboratory  
1013 NE 40<sup>th</sup> Street  
Seattle, WA 98105

phone: (206) 685-4058 fax: (206) 543-6785 email: [rainville@apl.washington.edu](mailto:rainville@apl.washington.edu)

Grant Number: N00014-08-1-0658  
<http://opd.apl.washington.edu/~rainville/>

### **LONG-TERM GOALS**

We are investigating the temporal and spatial evolution of the impact of typhoons on the upper ocean. In particular we plan to directly observe the mixing associated with turbulence generated by the strong air-sea forcing in a typhoon. These observations will be used to make quantifiable assessments of mixed layer models under the extreme conditions of a typhoon.

### **OBJECTIVES**

- Study the upper ocean response to typhoon forcing, in particular the evolution of the cold wake, using glider and ship measurements.
- Use a microstructure sensor package system on a glider for acquiring unprecedented measurements of turbulence during storms.

### **APPROACH**

Craig Lee (APL), Steven Jayne (WHOI), Louis St-Laurent (WHOI), and I are coordinating the use of glider and ship measurements to study the evolution of the cold wake typically observed in the upper ocean after the passage of a typhoon. Eight Seagliders (APL) and one SLOCUM glider (WHOI) will provide a context for the ITOP measurements, observing the mesoscale and internal wave fields. The current plan is to deploy four Seagliders in the spring 2009, and three to four Seagliders and the SLOCUM glider during the ship-based survey in September 2009. As part of that effort, I am leading the integration of micro-temperature sensors to two Seagliders.

The two Seagliders equipped with micro-temperature sensors and one SLOCUM turbulence glider will be deployed as part of the ship wake study. The SLOCUM glider will be recovered at the end of the cruise, but the two turbulence Seagliders, along with the other standard gliders, will remain in the area until the end of the ITOP field program. They will eventually be recovered as part of the mooring recovery cruise.

| Report Documentation Page  |                                    |                                     | Form Approved<br>OMB No. 0704-0188                        |   |                                 |
|--|------------------------------------|-------------------------------------|---|---|---------------------------------|
| Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. |                                    |                                     |   |   |                                 |
| 1. REPORT DATE<br><b>2009</b>  |                                    | 2. REPORT TYPE                      |   | 3. DATES COVERED<br><b>00-00-2009 to 00-00-2009</b> |                                 |
| 4. TITLE AND SUBTITLE<br><b>Impact of Typhoons on the Western Pacific: Observing the Evolution of Typhoon Wakes</b>  |                                    |                                     |   | 5a. CONTRACT NUMBER                                 |                                 |
|  |                                    |                                     |   | 5b. GRANT NUMBER                                    |                                 |
|  |                                    |                                     |   | 5c. PROGRAM ELEMENT NUMBER                          |                                 |
| 6. AUTHOR(S)   |                                    |                                     |   | 5d. PROJECT NUMBER                                  |                                 |
|  |                                    |                                     |   | 5e. TASK NUMBER                                     |                                 |
|  |                                    |                                     |   | 5f. WORK UNIT NUMBER                                |                                 |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)<br><b>University of Washington, Applied Physics Laboratory, Seattle, WA, 98105</b>  |                                    |                                     |   | 8. PERFORMING ORGANIZATION REPORT NUMBER            |                                 |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)  |                                    |                                     |   | 10. SPONSOR/MONITOR'S ACRONYM(S)                    |                                 |
|  |                                    |                                     |   | 11. SPONSOR/MONITOR'S REPORT NUMBER(S)              |                                 |
| 12. DISTRIBUTION/AVAILABILITY STATEMENT<br><b>Approved for public release; distribution unlimited</b>  |                                    |                                     |   |   |                                 |
| 13. SUPPLEMENTARY NOTES  |                                    |                                     |   |   |                                 |
| 14. ABSTRACT   |                                    |                                     |   |   |                                 |
| 15. SUBJECT TERMS  |                                    |                                     |   |   |                                 |
| 16. SECURITY CLASSIFICATION OF:  |                                    |                                     | 17. LIMITATION OF ABSTRACT<br><b>Same as Report (SAR)</b> | 18. NUMBER OF PAGES<br><b>5</b>                     | 19a. NAME OF RESPONSIBLE PERSON |
| a. REPORT<br><b>unclassified</b>   | b. ABSTRACT<br><b>unclassified</b> | c. THIS PAGE<br><b>unclassified</b> |   |   |                                 |

During the wake survey, the ship will be equipped with a towed-profiler, sampling tracks over 350 km long per day. During the same time, the 4-5 gliders (including our 2 micro-temperature Seagliders) can sample about 20 km. Sampling the top 200 or 300 m of the water column allows for horizontal resolution of about 1 km for both. The micro-temperature sensors will be fully integrated to the Seaglider, with a modified instrument holder. We do not expect significant impact on drag or for mission duration.

In a high-resolution simulation of a typhoon wake evolution, Baylor Fox-Kemper (Colorado University) finds that submesoscale eddies (1-10 km, 5-7 days) are likely to play a dominant role. Our sampling strategy (Figure 2), combining ship and gliders, will resolve the high temporal and spatial variability of the restratification process.

## **WORK COMPLETED**

### **Accelerometers**

A new electronic package that includes 3-D fast accelerometers has been designed and built at APL to measure the vibration of the Seaglider at high frequencies (up to 50 Hz). The board has been tested in the lab and shown to meet the specification required to measure the vibrations that might cause difficulties for turbulence measurements. More generally, these measurements will be helpful for Seaglider development. We expect to fly a glider with the accelerometers in October or November 2009. Knowledge of the vibrations of the glider during normal operating conditions will guide the development of future turbulence capacity (the potential use of micro-shear probes).

### **Micro-temperature sensors**

Two Seagliders will be equipped, each with 2 micro-temperature sensors. All the microstructure controller electronics will be housed inside the present pressure case. We will use the commercially available FP07-38 thermistors (Rockland Scientifics). The boards (thermistor circuit, anti-alias board, A/D board. And CF2 controller) have all been designed, and assembly has started. Three copies are being made (for two gliders, and a spare). All the controller electronics will be ready for testing and calibrations in October 2009. The firmware required for the micro-temperature sensor and Seaglider integration is ready.

We are currently designing the new instrument holder ("CTD sail" sitting on top of the glider) to accommodate two micro-temperature sensors. They will be sitting above and forward of the current temperature sensor and conductivity cell.

### **Schedule**

|              |   |
|--------------|---|
| Oct 2009     | build and test the circuit boards           |
| Nov 2009     | interface boards and thermistors            |
| Dec 2009     | all hardware on hand, connected and working |
| Jan 2009     | Port Susan, WA, testing                     |
| Aug-Sep 2010 | ITOP deployment                             |

## **RESULTS**

We have no scientific results yet.

## **IMPACT/APPLICATIONS**

## **TRANSITIONS**


## **RELATED PROJECTS**

The ITOP measurements will take place in region where with large internal tides, propagating from Luzon Strait. Knowledge of the dynamics of those waves will be an important factor for the interpretation of the various ITOP datasets. The eastward propagation from Luzon Strait is also one of the objectives of the IWISE DRI. We are evaluating the existing data (drifters, floats, gliders) east of Luzon and working with modelers (Simmons, Ko) on these questions.


## **REFERENCES**

## **PUBLICATIONS**

No publications have been associated with this project yet.

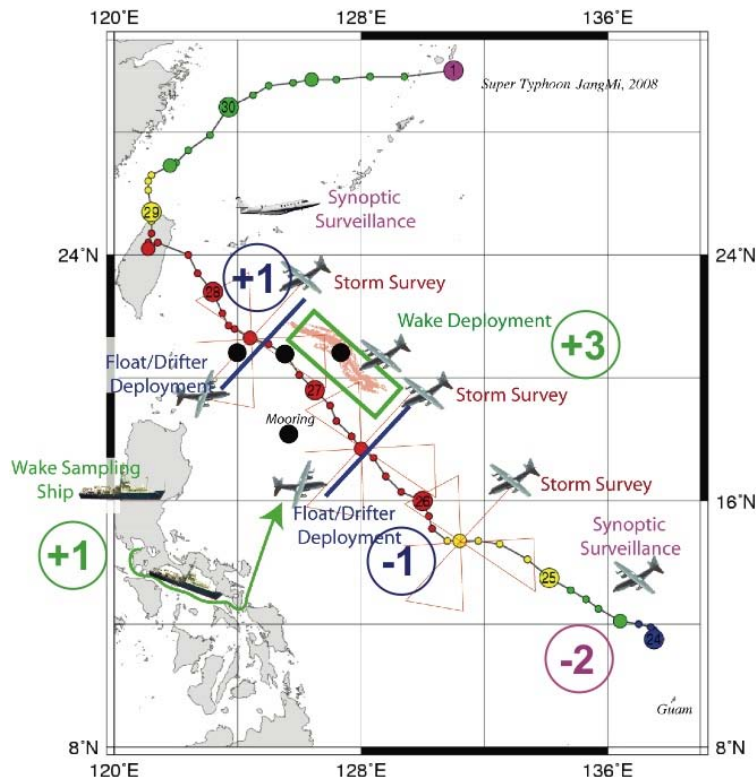

*Figure 1: Sampling plan for ITOP, schematically shown using the track from 2008 typhoon Jangmi. **The decision** to sample a storm can probably be made 2 days before (-2) it reaches the measurement area (green box). **Drifters and floats** will be air-deployed a little bit ahead and after the storm: (-1) and (+1). Also on the day following the storm (+1), **the ship** will leave port, reaching the survey area about 3 days after the storm (+3). By then the drifters and floats will likely have been dispersed by eddies and mean currents.*

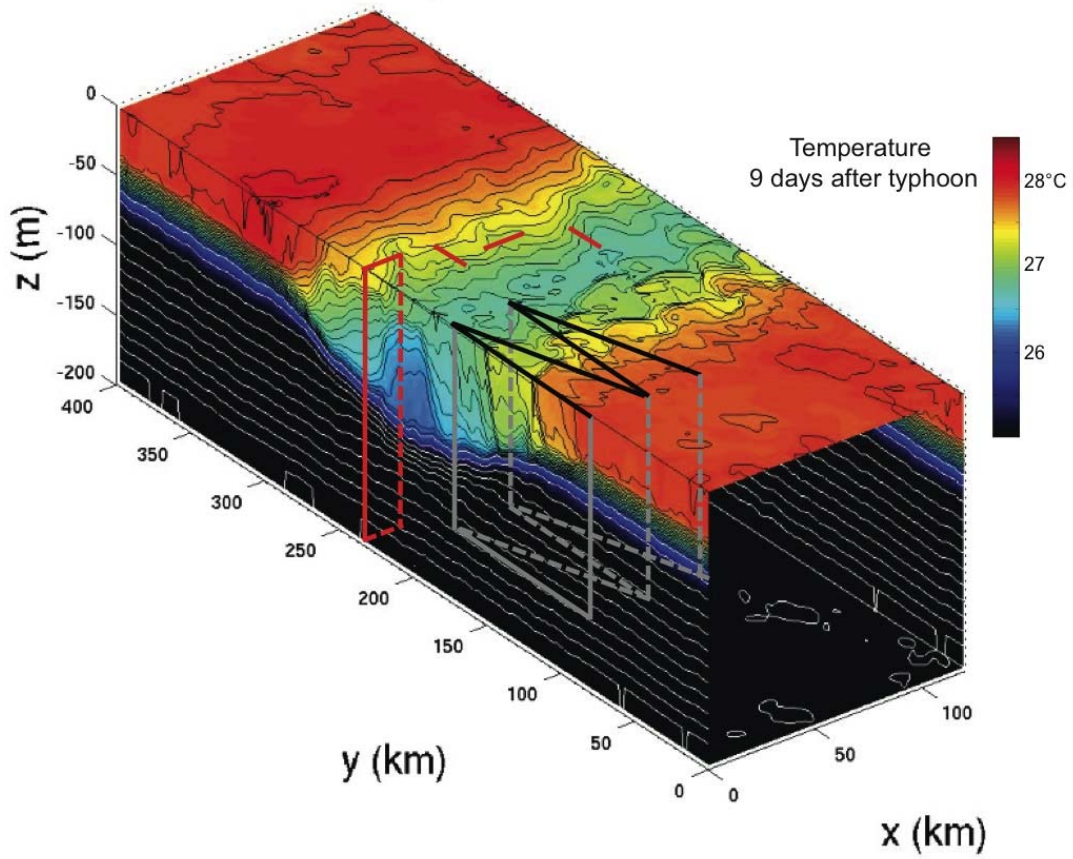

**Figure 2:** Example of ship (black) and glider (red) tracks during the wake sampling experiment. Colors indicate the temperature of the water column 9 days after the passage of a typhoon in a numerical simulation run by Baylor Fox-Kemper (Colorado University). Four 90-km transects are shown for the ship (black zig-zag), and the tracks of 4 gliders, each covering 15 km are shown.